Center of Excellence
Inflatable Composite Structures

Finite Element Modeling of Army Airbeam Structures

May 4, 2005

JOCOTAS – Port Hueneme, CA

U.S. Army RDECOM - Natick Soldier Center Collective Protection Directorate, Fabric Structures Team

Karen Santee – Project Engineer

Agenda

- Brief Overview of Airbeams
- Engineering Process
- Modeling Approaches
- Fabric Airbeam Models
- Modeling Technical Barrier
- Cavity Filled Membrane Models
- Airbeam and Fabric Membrane Models
- Application of Modeling
- Center of Excellence
- Current Small Business Innovative Research Projects

Brief Overview of Airbeams

Center of Excellence
Inflatable Composite Structures

- Load Bearing Pressurized Fabric Structures
- Pressurization pre-tensions the fibers, creating a structure that is rigid under design loads, but deflects without damage when overloaded
- Outstanding strength-to-weight ratio

Engineering Process

Center of Excellence
Inflatable Composite Structures

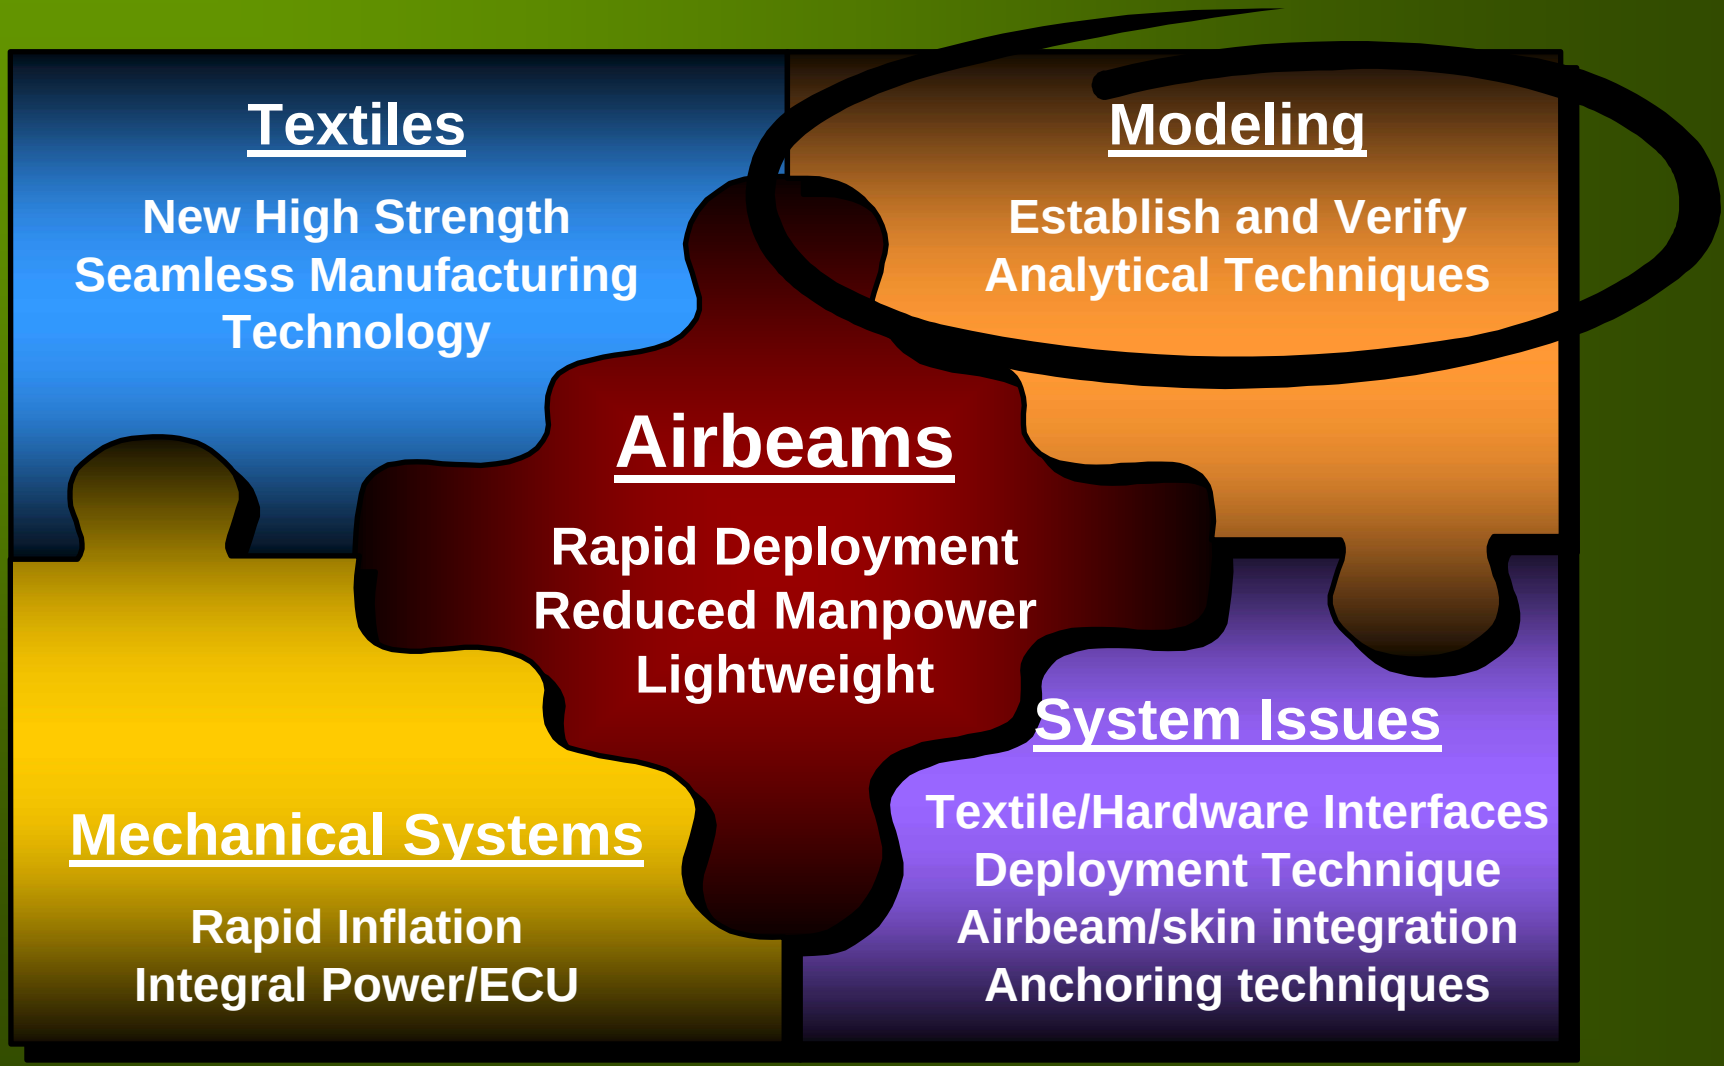

Modeling Approaches

Center of Excellence
Inflatable Composite Structures

Airbeam Fabric

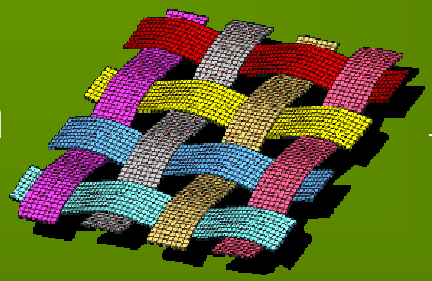



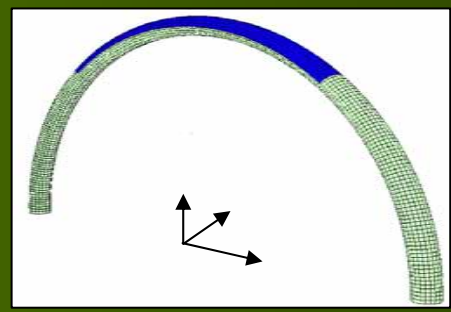

Cavity Filled Membrane

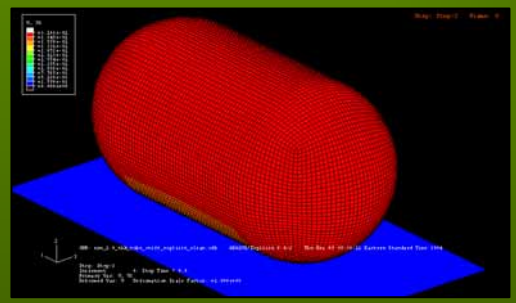

Airbeam & Fabric Membrane

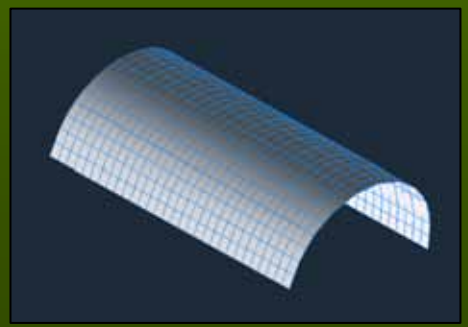

04 May 2005

Fabric Airbeam Models

Center of Excellence
Inflatable Composite Structures

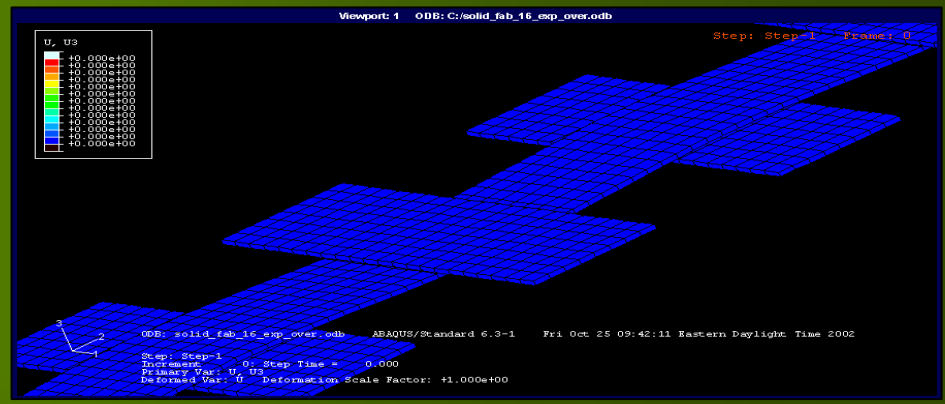

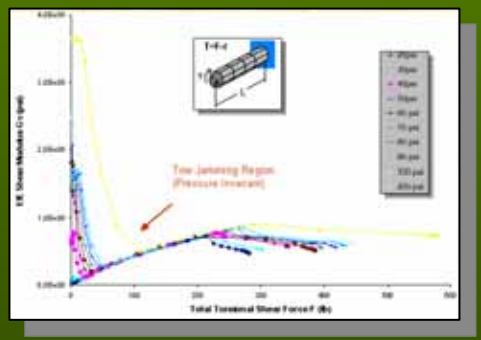

Finite Element Results for Shear

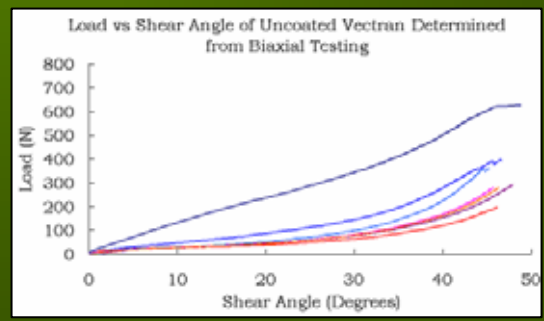

Experimental Results for Shear

04 May 2005

NAVSEA NEWPORT Undersea Warfare Center Division

UMASS

Modeling Technical Barrier

Center of Excellence
Inflatable Composite Structures

Barrier:

Test method to evaluate structural properties of fabrics subjected to combined multi-axial tension and shear loads for design purposes

Problem:

Fabric elastic modulus & shear stiffness are dependent on:

- ✓ Fiber Directions
- ✓ Fabric Construction
- ✓ Tow Density Ratios (TDR)
- ✓ Coatings
- ✓ Inflation Pressure
- ✓ Structural Loads

Solution:

A new test apprentice that can determine the pressure dependent elastic modulus and pressure dependent shear modulus.

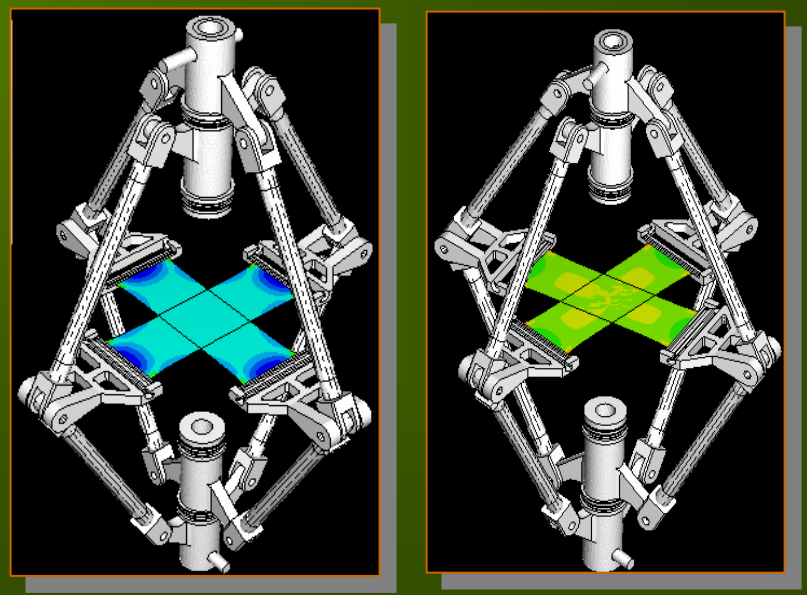

Patent Awarded

NAVSEA NEWPORT Undersea Warfare Center Division

04 May 2005

Cavity Filled Membrane Models

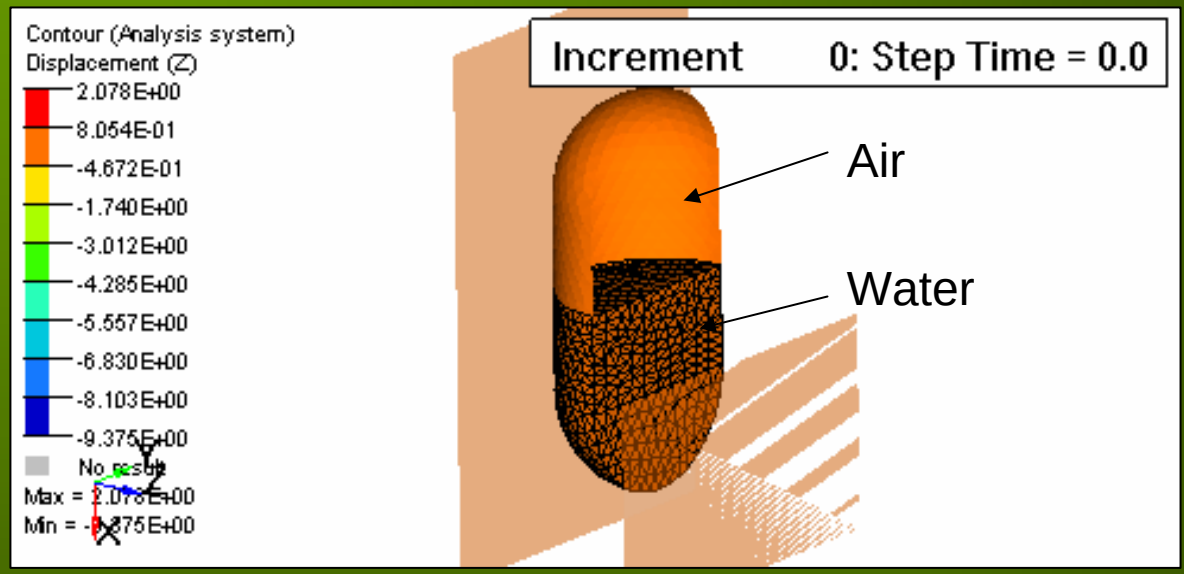

- Model results based on changes in cavity volume and inflation pressure
- Has begun to be explored and is in process of validation

Airbeam and Fabric Membrane Models

Center of Excellence
Inflatable Composite Structures

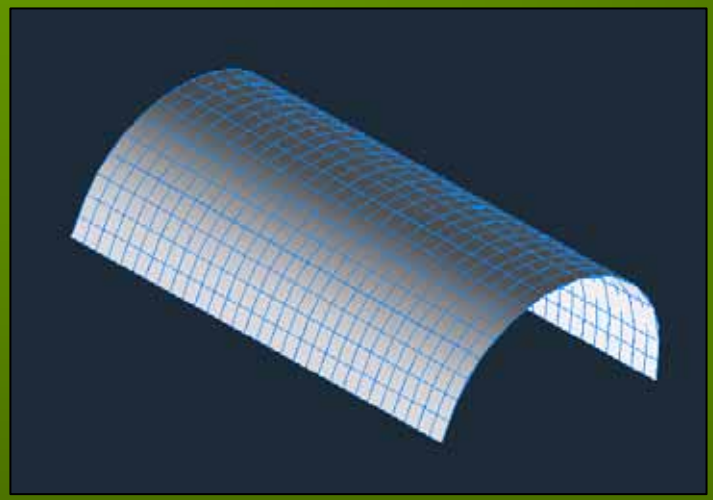

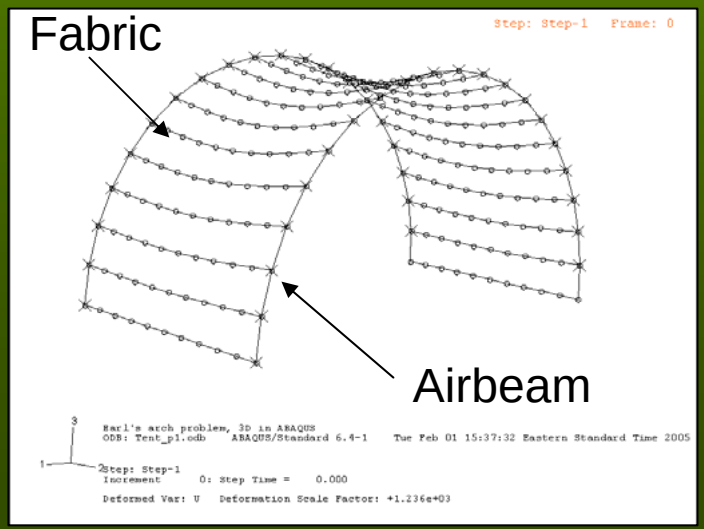

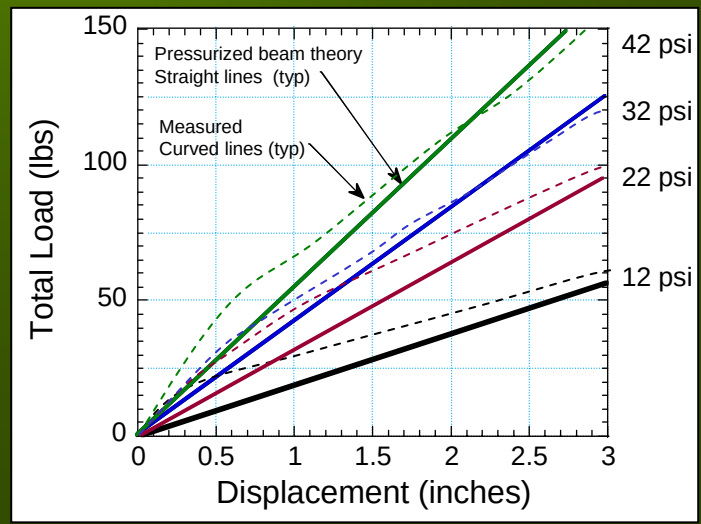

04 May 2005

Application of Modeling

Center of Excellence
Inflatable Composite Structures

Deployable Airbeam Fender System for the Joint High Speed Connector

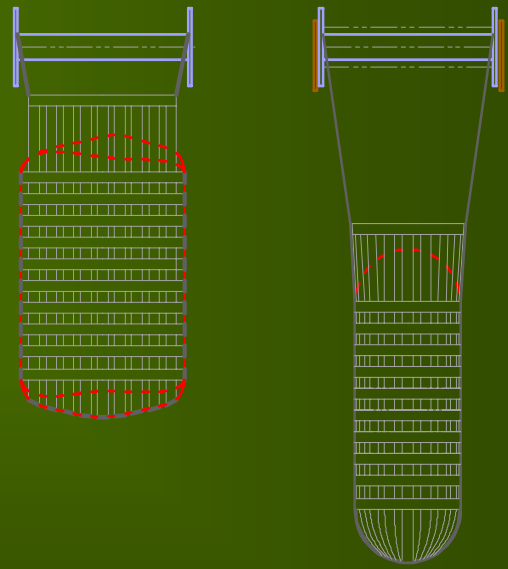

Deflated Inflated

04 May 2005

Verification of Model

Center of Excellence
Inflatable Composite Structures

Side View ~ 50% Compression

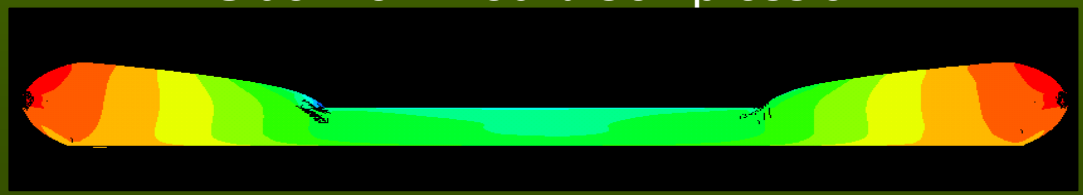

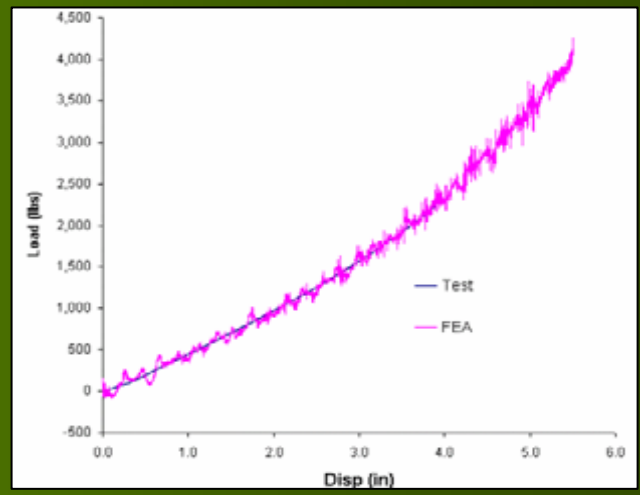

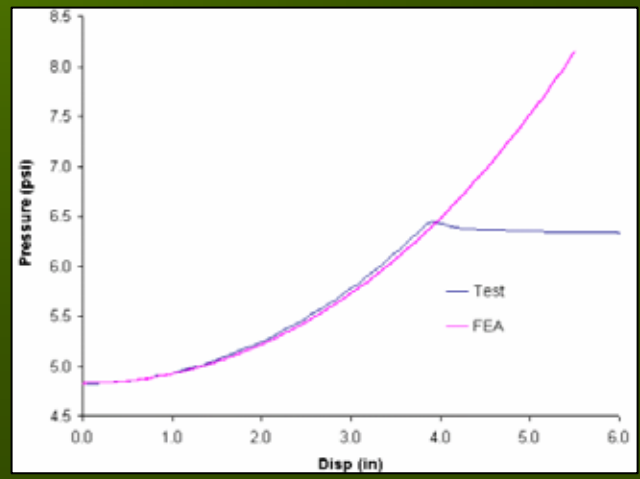

04 May 2005

Model Variations

Center of Excellence
Inflatable Composite Structures

Scaled Prototype Model

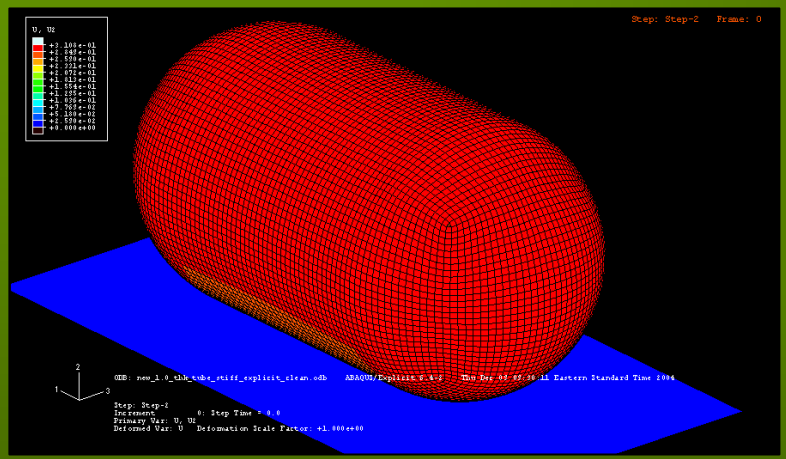

Partial Air and Water Model

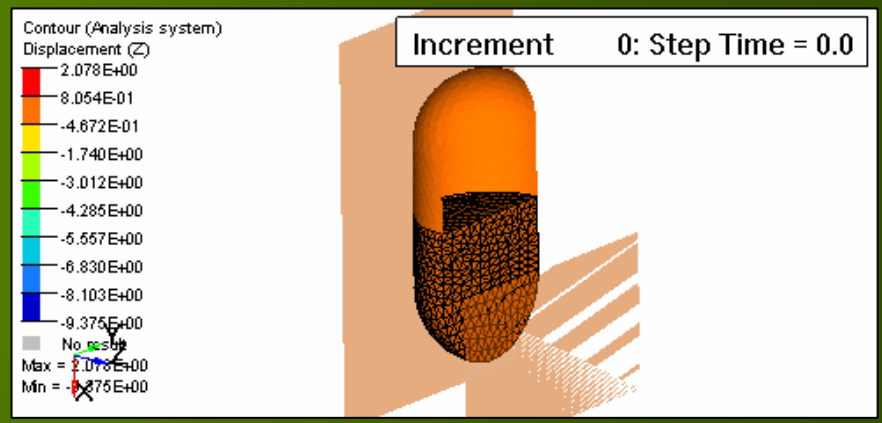

Side View of Pinch Point

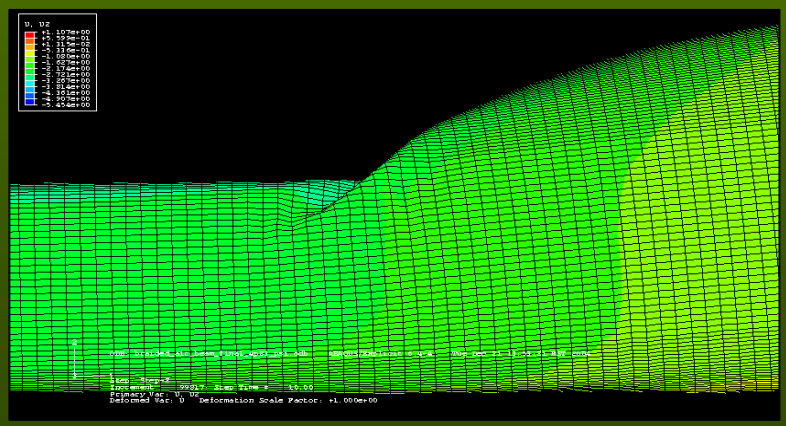

Partial Compression

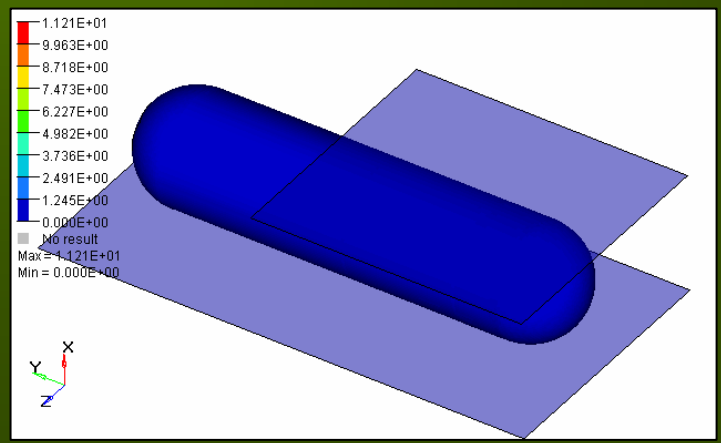

04 May 2005

Center of Excellence Inflatable Composite Structures

Center of Excellence
Inflatable Composite Structures

Increase durability, reliability and affordability

Establish predictive design tools and models

Market and Document Technology

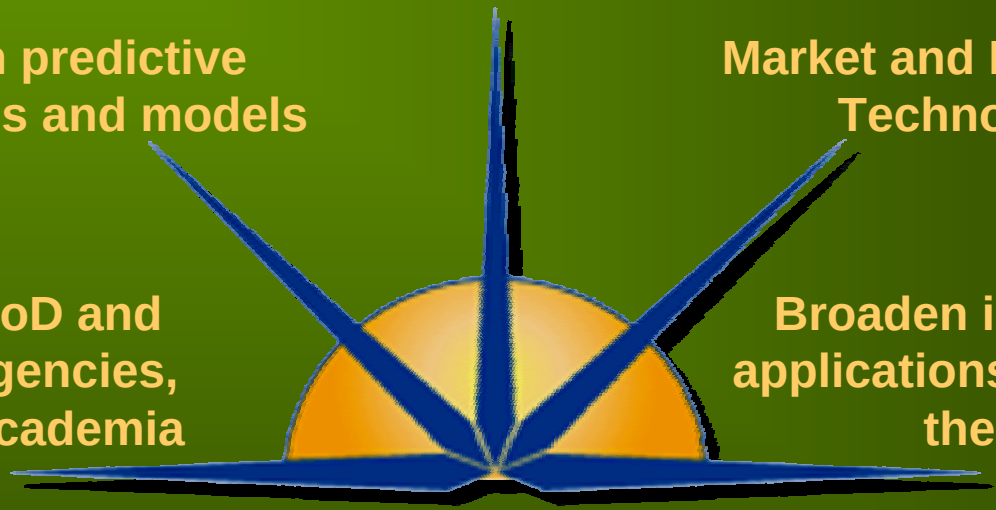

Partner with DoD and government agencies, industry, and academia

Broaden inflatable structure applications and commercialize the technology

Vision

Deliver new inflatable technology into the hands of warfighters and commercial users.

(Established in 2001 at the Natick Soldier Center in Natick, MA)

04 May 2005

Small Business Innovative Research Project

Center of Excellence
Inflatable Composite Structures

- Flexible Display
  - Physical Optics Corporation
- Solid State Lighting
  - Space Hardware Optimization Technology
  - Physical Optics Corporation
- Photovoltaic Power Shade
  - Iowa Thin Film Technologies
- Insulation
  - Aspen Aerogels
  - L’Garde, Inc.

Flexible Display

Center of Excellence
Inflatable Composite Structures

POC Physical Optics Corporation

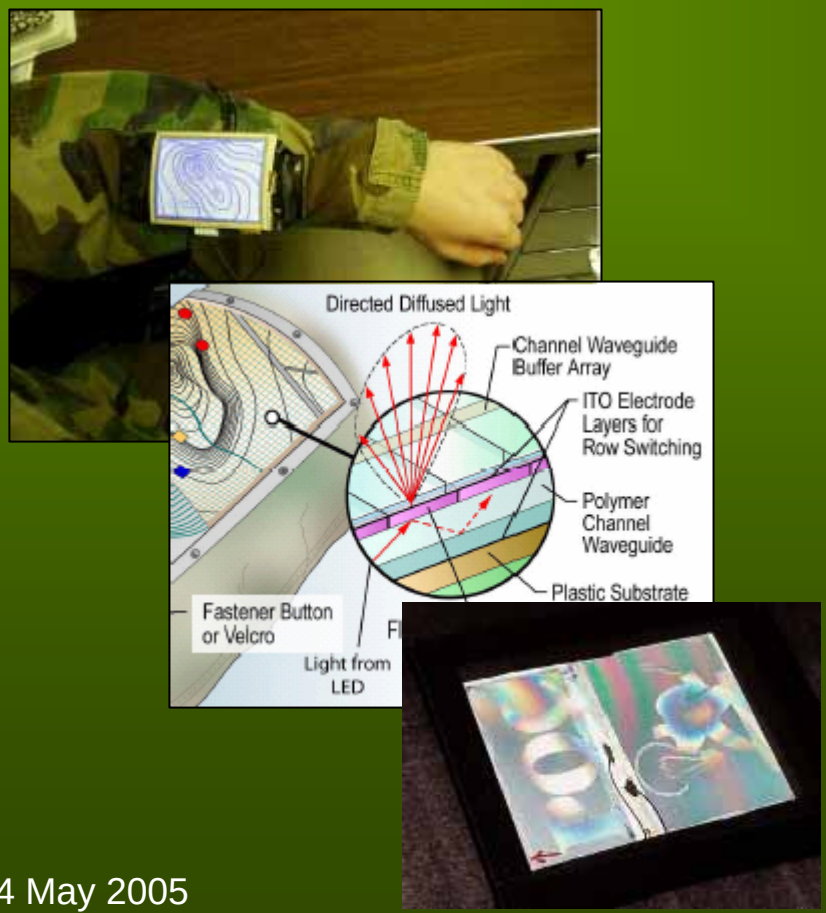

Capabilities:

- Ultra thin (<1 mm), flexible (6-10 cm bending radius), high-resolution (100 mm pixel size, total up to 640 x 480 pixels)
- Lightweight (<0.5 g per 1 cm^2 of display area, <100 g for electronics
- Full-color, real-time (30-60 Hz refresh), high-optical-contrast (>100:1) display
- Scalability in the display area (from 1 cm^2 to 1 m^2 active area)
- Visual images, such as maps and drawings, will be displayed on shelter fabric

Solid State Lighting

Center of Excellence
Inflatable Composite Structures

Capabilities

- Evenly illuminates floor level (one fixture for 1 m^2) 3 m^2 in near future
- Permanently attached to shelter (deployed together)
- Operates from outside power or from battery 100,000 hr. lifetime
- Runs 6 hr. on 5 AA batteries with power shutoff
- 10 times longer life than fluorescent light
- Compact, lightweight (100 g fixture)
- All light is directed to the floor (no dispersed light)
- Solar spectrum
- Low cost in mass production ($5/fixture)

SOSIL Luminaire

POC Physical Optics Corporation

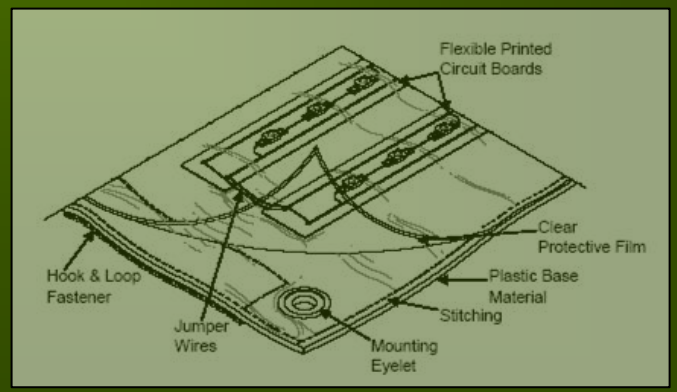

SHOT®

04 May 2005

Photovoltaic Power Shade

Center of Excellence
Inflatable Composite Structures

"Power Shade"

Application:

- Solar shade w/ integral PV power
- Provides 1 Kw of PV power, reduces solar load 80% – 90%
- Design to fit over: MGPTS small, 16' TEMPER
- Modular expandability

Dimensions: 22' x 20' x 10'9"- 14'6"
Power: ~1 **Kw**
Operating Voltage: 12V
BOS required
PV combiner boxes
Master disconnect switch
Charge controllers
12V Deep cycle batteries
Inverter for 120 VAC use

IOWA THIN FILM TECHNOLOGIES

04 May 2005

Insulation

Center of Excellence
Inflatable Composite Structures

- Aspen Aerogels
  - 85% Packing Cube Reduction
  - R-value > 6 °F·ft²·hr/Btu
  - Flame Resistance
  - 99% Open Porosity
  - Noise and IR Suppression
  - Phase II partner with Johnson Outdoors

- L'Garde
  - Phase III
  - R-value > 6 °F·ft²·hr/Btu
  - Weight < 20 oz/yd²
  - Demonstrated 65% reduction in heating/cooling power requirements
  - Automated fabrication
  - Adjustable to fit multiple shelter geometries

MIL-C-44154B Aspen Insulation

Center of Excellence
Inflatable Composite Structures

Thank You